

Lms34LED-4M series




Device parameters	Symbol	Value	Units
Operating/ storage temperature	T_{stg}	-60..+90*	$^{\circ}\text{C}$
Soldering temperature (can be applied for not more than 5 secs)	T_{sol}	+180	$^{\circ}\text{C}$

*Temperature range may vary for different packaging types.


All parameters refer to LED arrays in TO18 flat header and operation at ambient temperature 25°C unless otherwise stated.

LED parameters	Conditions	Symbol	Value	Units
Peak emission wavelength ¹	qCW mode ³ $I = 200\text{ mA}$	λ_p	3.30 - 3.44	μm
FWHM of the emission band ¹	qCW mode ³ $I = 200\text{ mA}$	FWHM	250 - 600	nm
Average optical power (minimal / typical) ¹	qCW mode ³ $I = 800\text{ mA}$	P_{qcw}	min 70 / typ 100	μW
Peak optical power (minimal / typical) ²	Pulse mode ⁴ $I = 4\text{ A}$	P_{pul}	min 500 / typ 700	μW
Maximum operating current	qCW mode ³	$I_{max\ qcw}$	1	A
	Pulse mode ⁴	$I_{max\ pulse}$	8	A
Forward voltage ¹	qCW mode ³ $I = 800\text{ mA}$	V	0.3 - 1.0	V


Typical spectra at different currents (qCW³)

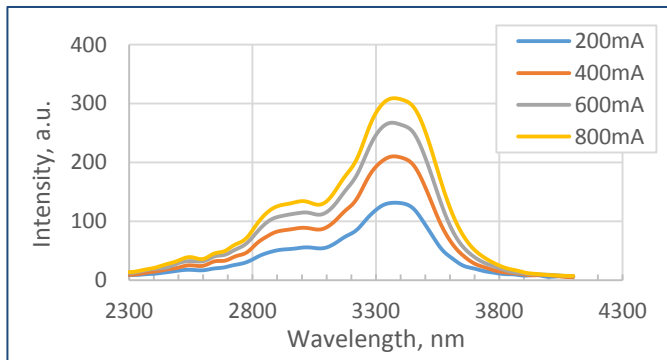


Spectra at different temperatures (qCW³, 800 mA)

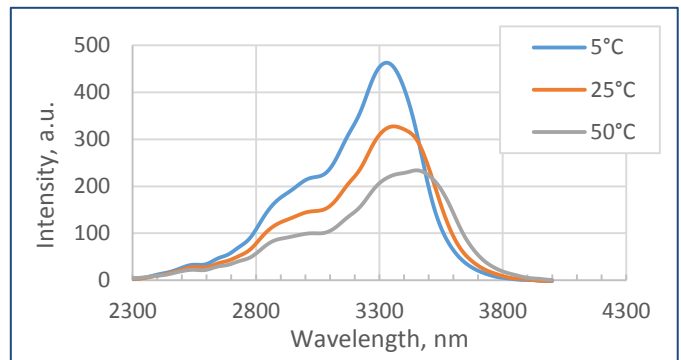

Typical optical power characteristic (qCW³)

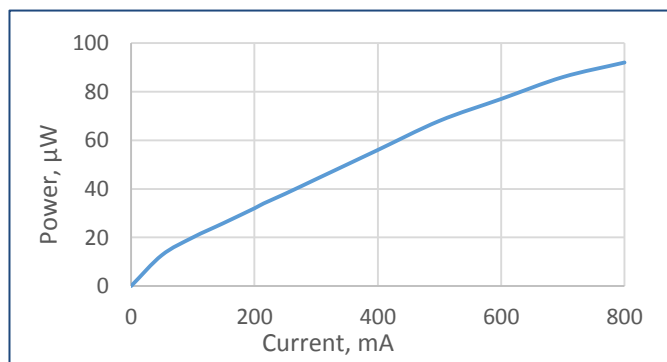

Typical current-voltage characteristic (qCW³)

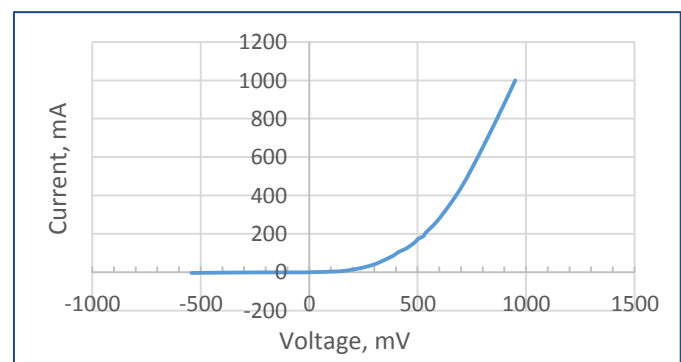

¹ Parameter tested for each device.

² Parameter tested for representative sampling.

³ qCW mode: repetition rate: 0.5 KHz, pulse duration: 1 ms, duty cycle: 50%.

⁴ Pulse mode: repetition rate: 0.5 KHz, pulse duration: 20 μs , duty cycle: 1%.


Packages	Model
TO-18 with a cap without a glass window	Lms34LED-4M
TO-18 with a parabolic reflector without a glass window	Lms34LED-4M-R
TO-18 with a parabolic reflector with a glass window	Lms34LED-4M-RW
TO-5 with a built-in thermocooler and thermoresistor, covered by a cap with a glass window	Lms34LED-4M-TEM
TO-5 with a built-in thermocooler and thermoresistor, covered by a parabolic reflector with a glass window	Lms34LED-4M-TEM-R

Related products:


- **Photodiodes Lms36PD series** - detectors of mid-infrared radiation;
 - **LED driver D-41i** - provides LED array power supply.
- NOTE!** nominal driver current will be divided by 4 (number of chips in an array)

To drive the LED we recommend the following basic circuit connections:

LED basic circuit connection

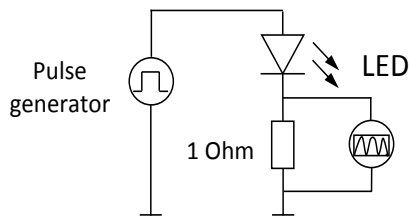


LED with thermoelectric module basic circuit connection

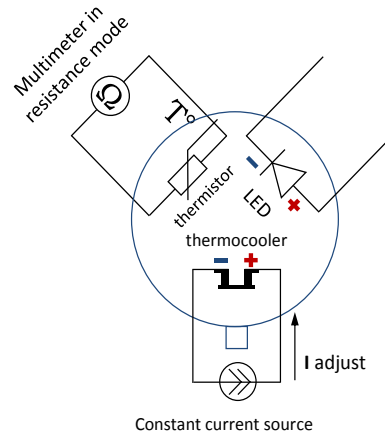


We recommend using **Quasi Continuous Wave (qCW) mode** with a duty cycle 50% or 25% to obtain maximum average optical power and short **Pulse modes** to obtain maximum peak power. Hard CW (continuous wave) mode is NOT recommended.

Quasi Continuous Wave (qCW) mode

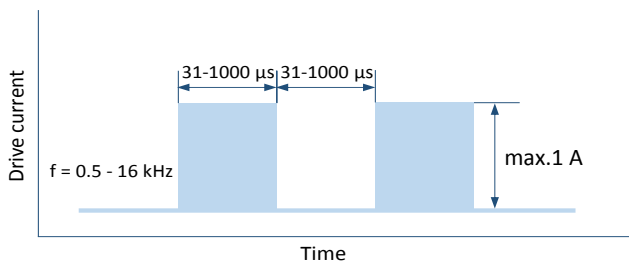

Pulse mode

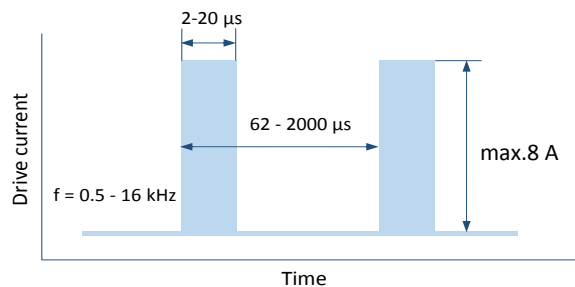


IMPORTANT CAUTIONS:



- please check your connection circuit before turning on the LED array;
- please mind the LED array polarity: anode is marked with a RED dot; REVERSE voltage applying is FORBIDDEN;
- please do not connect the LED array to the multimeter;
- please control the CURRENT applied to the LED array in order NOT to EXCEED the maximum allowable values.

Technical Drawings

Lms34LED-4M

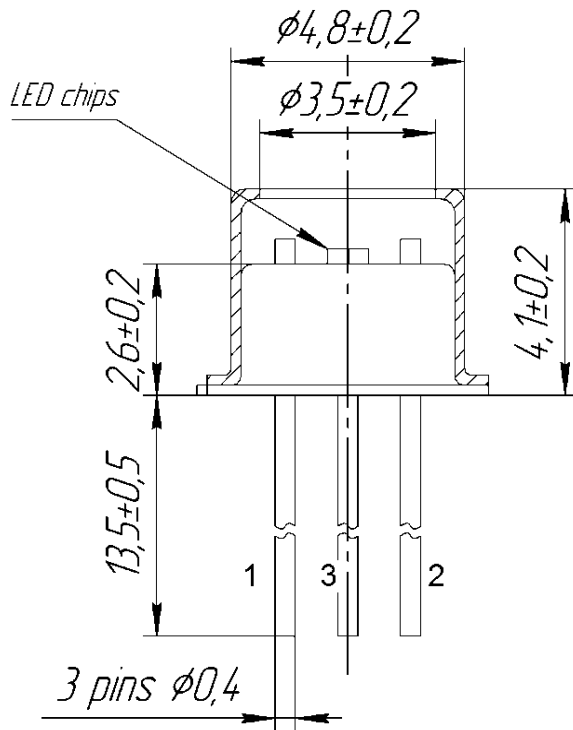


1 - LEDs cathode
3 - LEDs anode

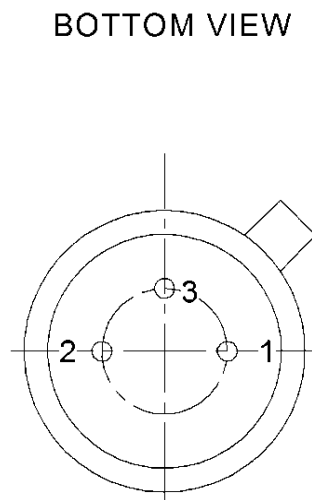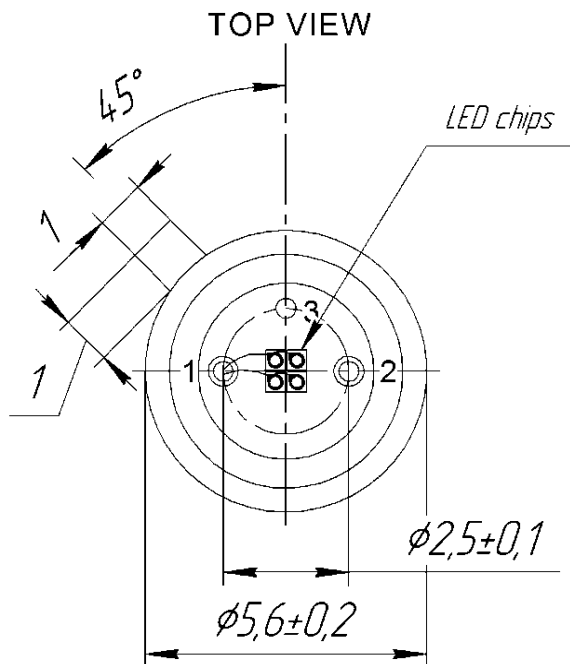


Technical Drawings

Lms34LED-4M-R

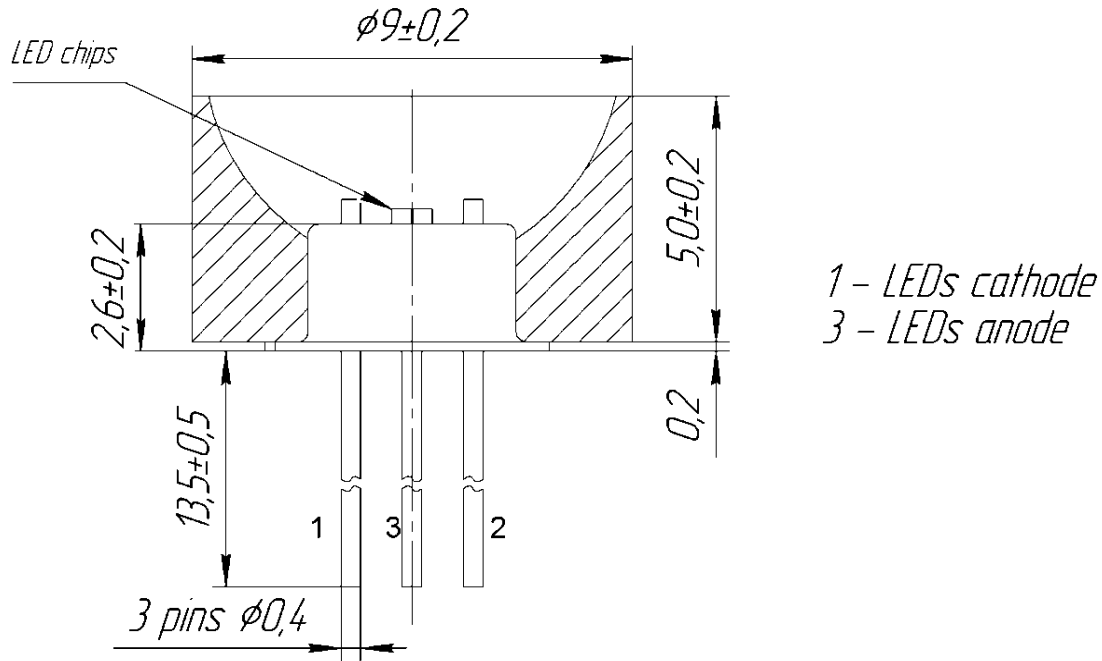


TOP VIEW

BOTTOM VIEW

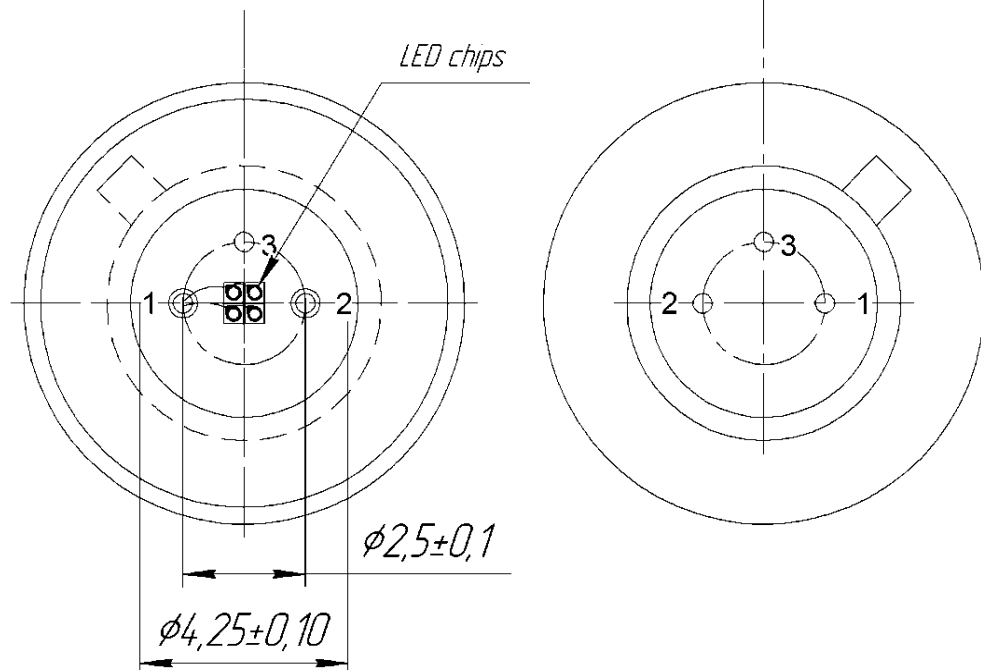


Technical Drawings

Lms34LED-4M-RW

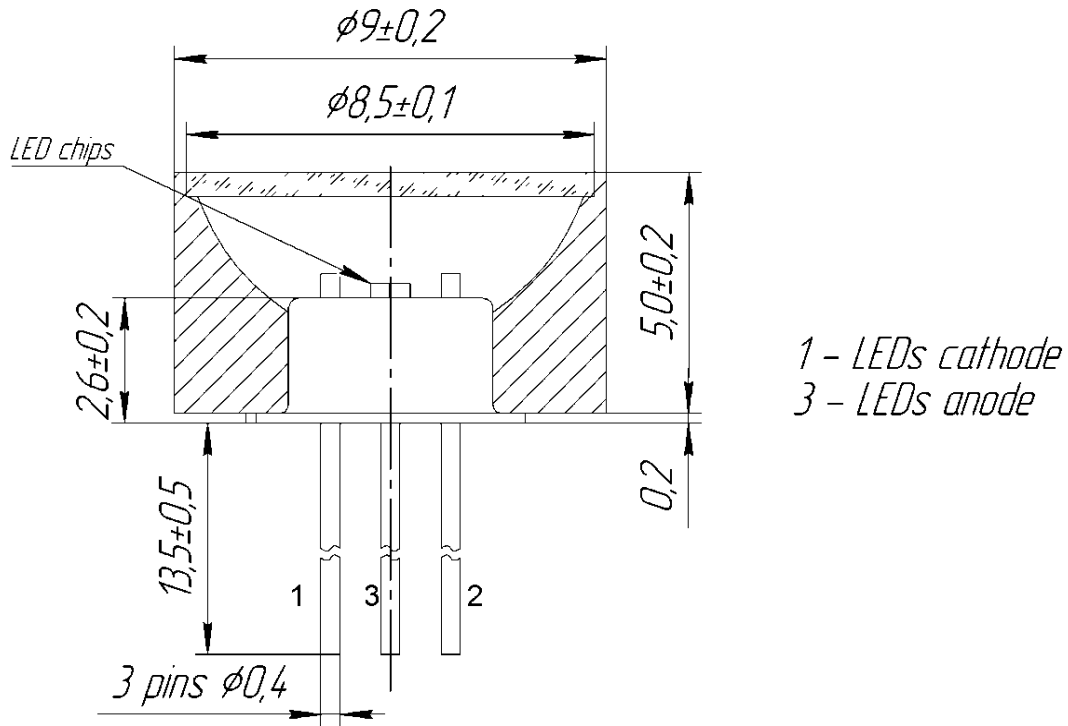


TOP VIEW

BOTTOM VIEW

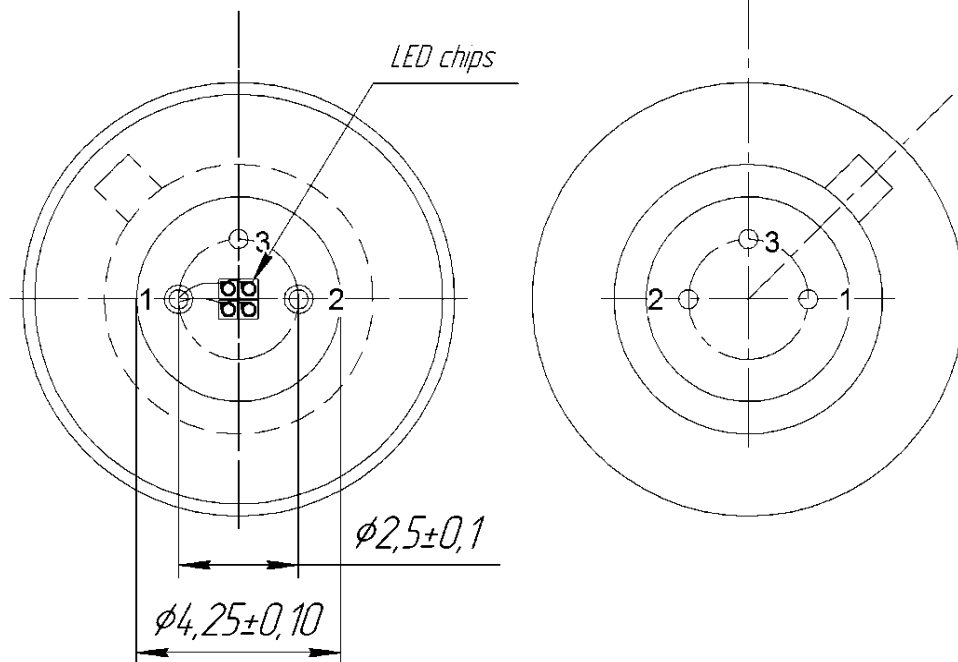

Technical Drawings


Lms34LED-4M-TEM

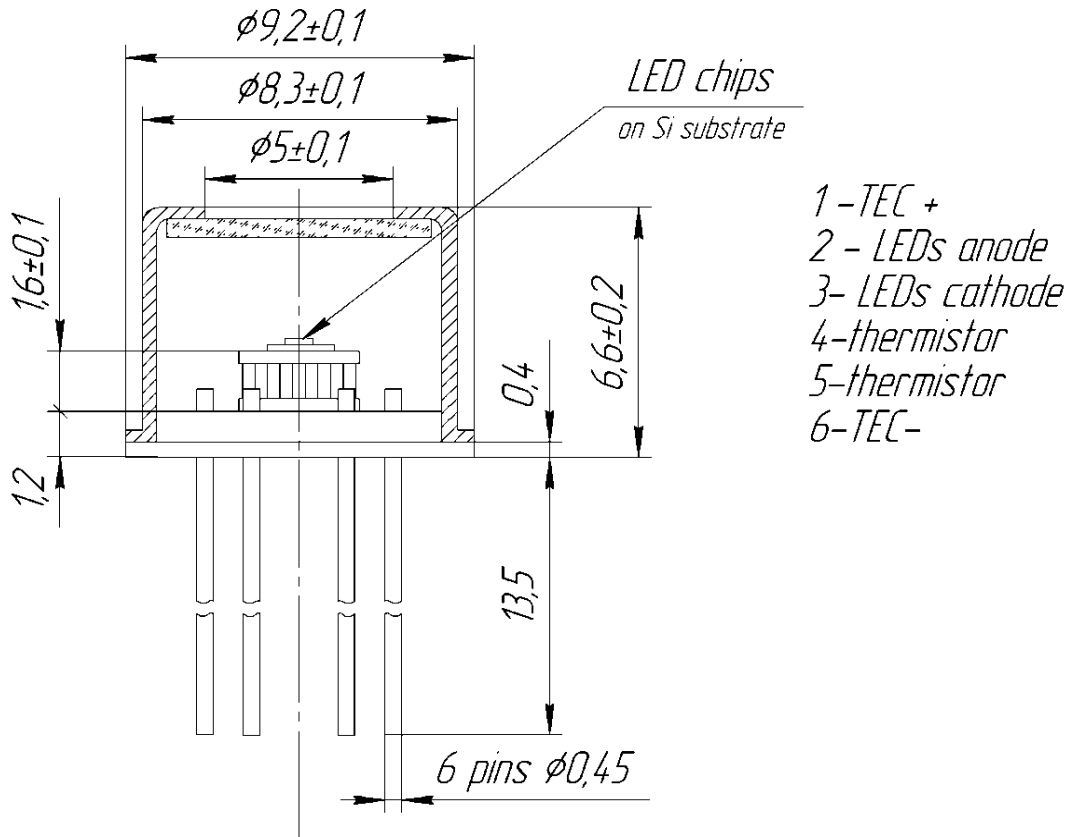

- 1 - TEC +
- 2 - LEDs anode
- 3 - LEDs cathode
- 4 - thermistor
- 5 - thermistor
- 6 - TEC -


TOP VIEW

BOTTOM VIEW

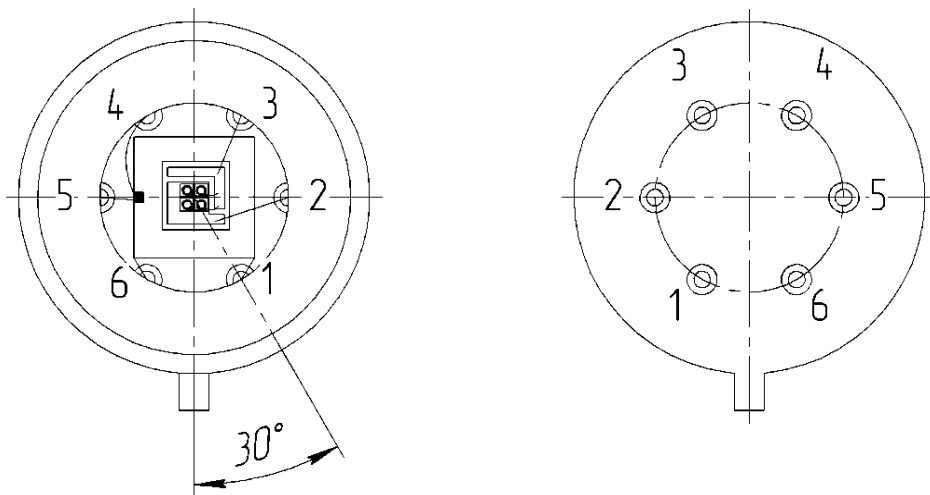


Technical Drawings

Lms34LED-4M-TEM-R

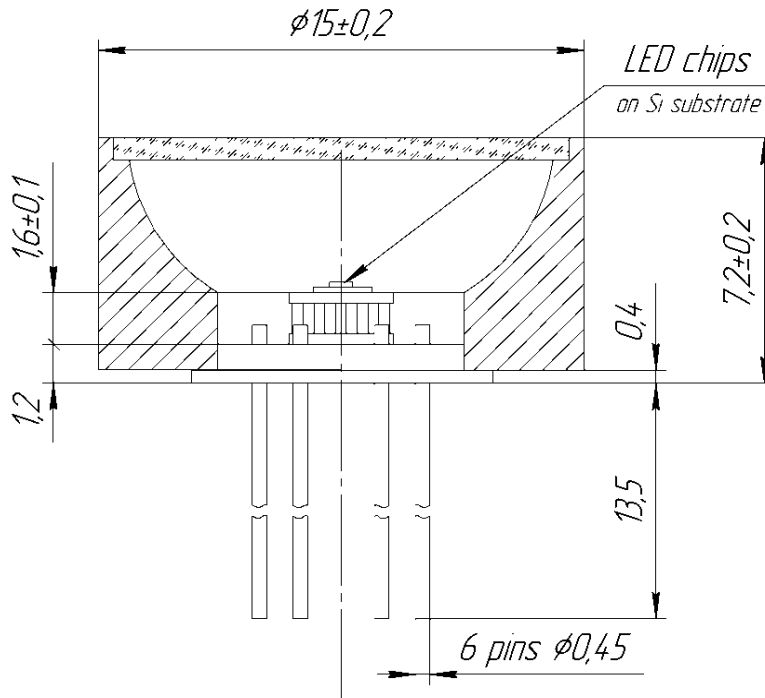

- 1 - TEC +
- 2 - LEDs anode
- 3 - LEDs cathode
- 4 - thermistor
- 5 - thermistor
- 6 - TEC -

TOP VIEW

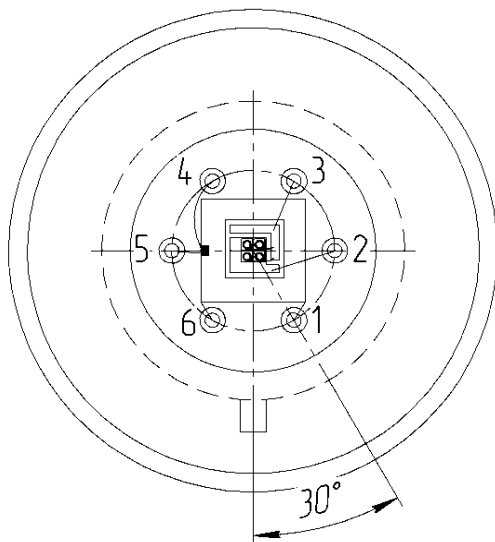

BOTTOM VIEW

